



Rotary Drum Cleaners

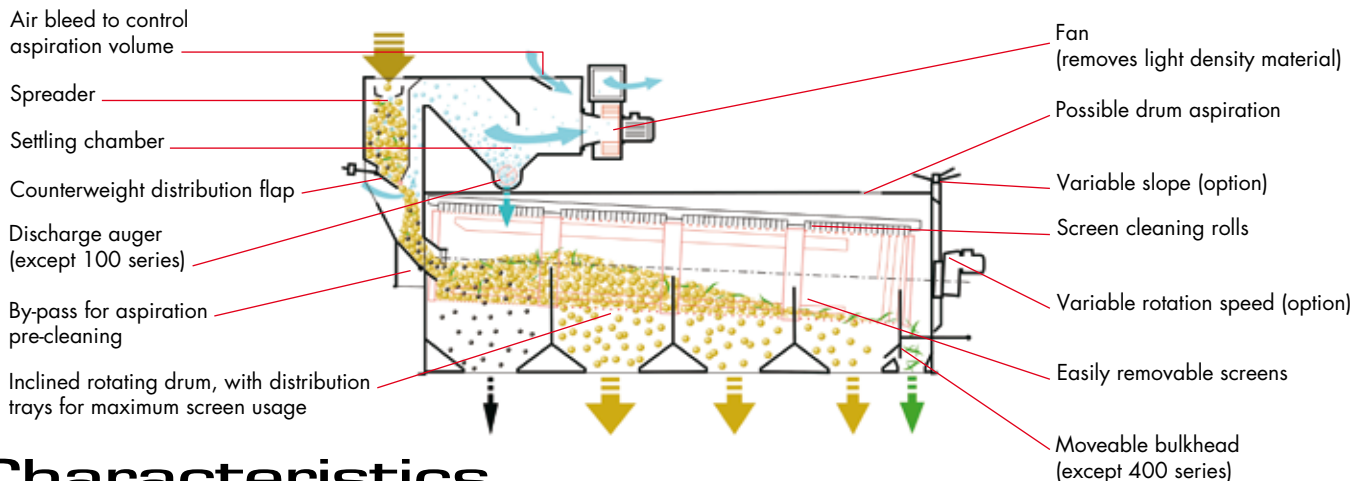

General description

With the efficient rotary drum combined with the powerful aspiration system, the **DENIS Rotary Drum Cleaners** are ideally suited for rubble separation, pre-cleaning, cleaning, commercial cleaning, seed cleaning, and grading all cereals and grains. By their widely proven technical design, they are capable of producing a high quality sample.

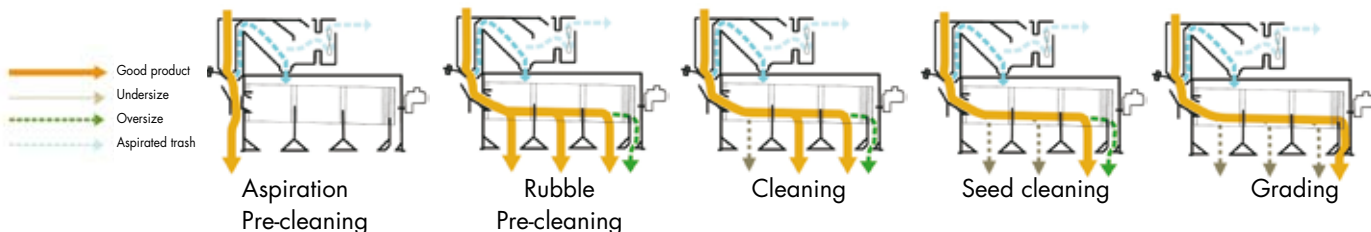

Characteristics

Model	Number of screens	Drum diameter (mm)	Dimensions (m)	Aspirating Pre-cleaning *	Rubble Pre-cleaning *	Cleaning *	Grading *
SNS 103	3	460	2,75 x 1,00 x 1,50	-	6	5	1,5
SNS 104	4	460	3,30 x 1,00 x 1,50	-	8	7	3
NR 203	3	630	3,30 x 1,15 x 2,00	40	30	15	4
NR 204	4	630	3,95 x 1,15 x 2,00	40	35	25	6
NR 303	3	805	4,75 x 1,50 x 2,50	90	70	50	8
NR 304	4	805	5,85 x 1,50 x 2,50	90	90	70	12
NR 403	3	1260	5,40 x 2,10 x 3,50	250	200	110	14
NR 404	4	1260	6,60 x 2,10 x 3,50	250	250	200	20
NR 405	5	1260	7,75 x 2,10 x 3,50	250	250	200	25

*T/ H, Guide only, based on wheat with density 750 kg/m³ and 2 % impurities

Extras

- Adaptors and diverters for inlets and outlets
- Air ducting for aspiration exhaust



Options

- Variable speed drum
- Adjustable drum angle between 1.5 and 5 degrees (not on 100 series)
- Working platforms and stands
- Left hand door opening
- Supply of drum (CR) or aspiration (NA) separately on request

CE All our equipment meets the legal safety requirements



Avenue Louis-Denis - 28160 Brou - France
Tél. +33 (0)2 37 97 66 11 • Fax +33 (0)2 37 97 66 40
www.denis.fr



These characteristics related to this documentation are given as an indication only and can be modified at any time without notice to improve the product. This manufacturer cannot in any way be held responsible for these changes.